

## Adjustable IN/OUT BOX™ for Ceiling Fixtures



Non-metallic. Preset for 1/2" ceiling, adjusts up to 1-1/2" to accommodate varying ceiling thicknesses, like single or double drywall.

### FEATURES AND BENEFITS


- Always accessible depth adjustment screw allows depth adjustment *before or after* ceiling is in place
- Mounts securely to joist in new construction
- Listed for fixture support up to 50 lbs
- 2-hour fire rating

| CATALOG NUMBER | UPC/DCI/NAED MFG #018997 | DESCRIPTION / STYLE                     | UNIT PKG | STD PKG | DIM A | DIM B | DIM C | DIM D |
|----------------|--------------------------|---|----------|---------|-------|-------|-------|-------|
| FA426          | 40040                    | For 1/2" or 1-1/2" Drywall 20.5 Cu. In. | 25       | 25      | 3.520 | 4.800 | 4.381 | 4.000 |
| FA426GC*       | 40041                    | For 1/2" or 1-1/2" Drywall 20.5 Cu. In. | 25       | 25      | 3.520 | 4.800 | 4.381 | 4.000 |

\*Includes ground clip for ordering in Canada.

**PATENT PENDING.**

Note: Complies with 2014 NEC, 314.20 for set back boxes.

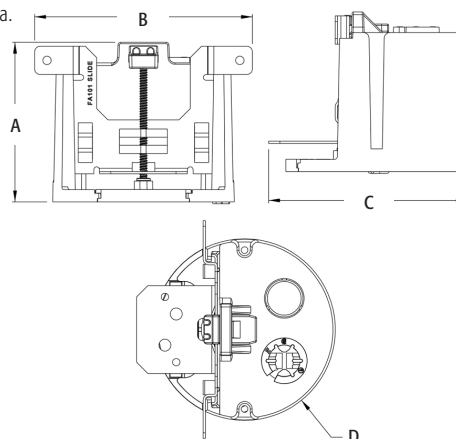

Set-back in double drywall



Flush with ceiling

